

# BioSurface Technologies Corporation


## Microscopy and Image Analysis Flow Cells

[All BioSurface Technologies Flow Cells are Completely Autoclavable and Reuseable]

### FC 91 Capillary Flow Cells

Capillary Flow Cells are designed to image biofilm formation in glass capillaries under a wide range of flow rates and surface shear conditions. These Flow Cells use square glass capillaries as viewing windows and flow channels. Each Capillary Flow Cell holds 4 glass capillaries in a capillary holder. The range of flow rates through the capillaries is much wider than is allowed in the flat plate flow cells. Fluid flow characterization from laminar to turbulent flow can be achieved in the Capillary Flow Cells.

#### DESCRIPTION

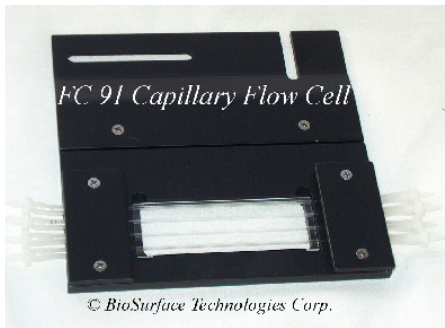

The FC 91 Capillary Flow Cell is a 4-channel capillary flow cell. Each flow channel consists of a 1 mm ID square, borosilicate glass capillary. Wall thickness of the glass capillary is 0.15 mm, which allows use of high power objectives, including oil and water immersion objectives. The FC 91 Capillary Flow Cell is compatible with transmitted, reflected, fluorescence, and confocal microscopy. Barbed connectors provided are compatible with size 13 (1 mm ID) tubing (check flow cell dimensions for stage compatibility).



#### PRICING (USD)

##### FC 91 Capillary Flow Cell

**\$400.00 \***

1-mm ID square glass capillary flow cell, 4 channel includes:

standard platform-stage microscope mount, 4 glass capillary flow channels.

##### FC 91-4.25 Replacement Capillary Flow Channel (each)

**\$20.00 \***

includes: 1 mm square glass capillary with silicone tubing and barbed connectors.

\*Pricing shown is for domestic US Market on net 30 day terms. Please Contact BioSurface Technologies Corporation, or one of our international distributors for international pricing and delivery.